


Nylon cable tie - Black - UV1000

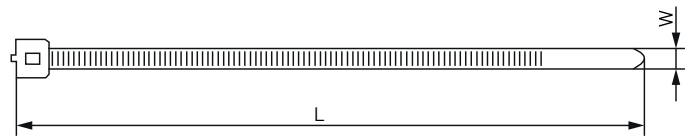

UV-1000 nylon cable ties are manufactured in Vydyn® 25WSP Resin, which increases the resistance to ultraviolet radiation and the useful life of these cable ties in outdoor applications by more than 4 times that of standard cable ties.

COFIL UV-1000 cable ties are particularly recommended for use in outdoor applications or in adverse weather conditions. They also have superior resistance to abrasion, chemical products, solvents and petrol. These cable ties have successfully passed UV and weather ageing resistance tests, guaranteeing UV resistance of 1,000 hours according to EN ISO 4892-2.

MATERIAL: Vydyn® 25WSP PA 6.6

Halogen-free

REGULATION: EN 62275/15 - RoHS Directive (2015/863/EU)

Tensile test according to UL 62275

UV-resistance according to EN ISO 4892-2

Dimension W x L	Part Number	W	L	Ø Max. application in loop (mm)	Strength in loop (N)	Box Quantity	Outer Box Quantity
2,5 x 100	0300003NUV	2,5	100	20,5	80	100	50.000
2,5 x 160	0300006NUV	2,5	160	39,8	80	100	25.000
2,5 x 200	0300007NUV	2,5	200	52,5	80	100	25.000
3,6 x 140	0300011NUV	3,6	140	33,0	180	100	25.000
3,6 x 200	0300014NUV	3,6	200	46,0	180	100	20.000
3,6 x 250	0300015NUV	3,6	250	68,0	180	100	10.000
3,6 x 300	0300016NUV	3,6	300	84,0	180	100	10.000
3,6 x 370	0300017NUV	3,6	370	106,0	180	100	10.000
4,8 x 200	0300021NUV	4,8	200	49,5	250	100	10.000
4,8 x 250	0300023NUV	4,8	250	65,0	250	100	10.000
4,8 x 280	0300025NUV	4,8	280	74,8	250	100	10.000
4,8 x 300	0300026NUV	4,8	300	81,0	250	100	10.000
4,8 x 370	0300027NUV	4,8	370	103,5	250	100	5.000
4,8 x 430	0300029NUV	4,8	430	122,5	250	100	5.000
4,8 x 450	0300030NUV	4,8	450	129,0	250	100	5.000
7,6 x 200	0300037NUV	7,6	200	50,9	550	100	5.000
7,6 x 250	0300038NUV	7,6	250	66,8	550	100	5.000
7,6 x 300	0300039NUV	7,6	300	82,8	550	100	5.000
7,6 x 370	0300040NUV	7,6	370	103,5	550	100	5.000
7,6 x 450	0300041NUV	7,6	450	10,5	550	100	2.000
7,6 x 540	0300042NUV	7,6	540	159,0	550	100	1.000
7,6 x 750	0300073NUV	7,6	750	224,0	550	100	1.000