

This lightweight device is ideal when working space is limited and very compact equipment is required. **Manufactured from high-strength alloy steel to ensure a long life.** The chain slides very smoothly when in the neutral lifting position, allowing quick adjustment to the desired position for loading. The lever drive does not require great effort. It also has a **permanent chain guide for greater safety** during lifting, and its **braking system is highly secure and allows locking at any height.**

Standards:

2006/42/CE

EN 13157:2004 + A1: 2009


EN ISO 12100:2010

FINISH:

- Suspension hook and Load Hook in Red Alloy steel
- Load chain Grade 80 (EN 818/1) in Black
- Handle with non-slip rubber

PART NUMBER PAP-S1	09700002	09700005	09700008	09700011	
Load-bearing Capacity (Kg.)	250	750	1.500	3.000	
Elevation (m.)	1,5	1,5	1,5	1,5	
Chain Links	1	1	1	1	
Load Chain Ø X Pitch (mm.)	4X12	6x18	8X24	10X28	
Dimensions (mm.)	A	92	139	200	
	B	72	84	115	
	C	75	153	160	185
	D	28	38	45	50
	E	14	28	34	38
	F	150	250	363	363
H min	240	280	350	460	
Weight of equipment with chains (Kg.)	2	6,4	10,1	17,5	
Maximum effort for lifting (Kg.)	24	17,1	24	32,6	

Manual Lever Hoist

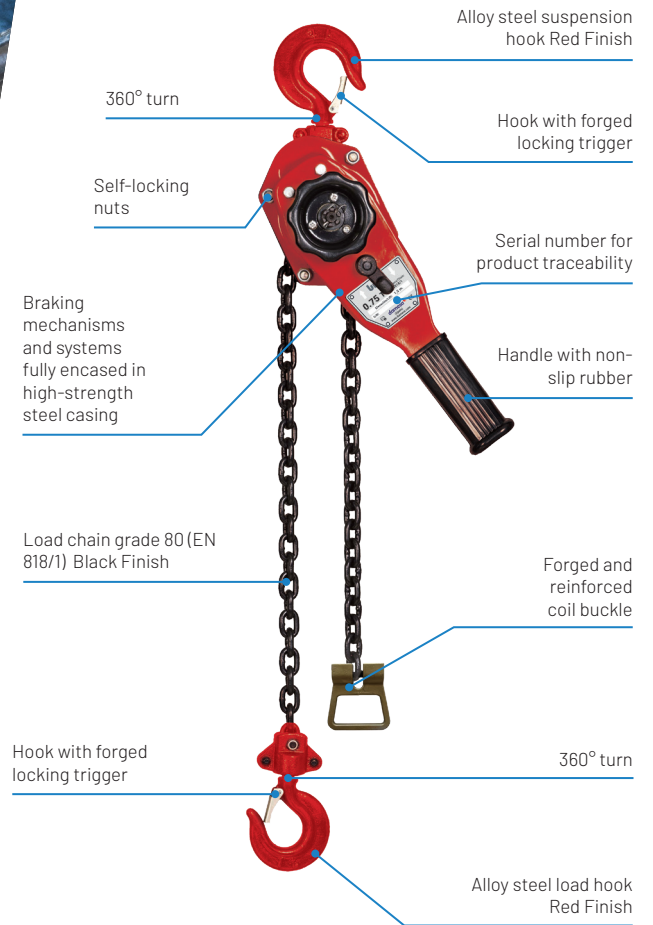

– These items are for industrial and construction activities, among others –
– See at www.damesa.com "Use and Precautions Instructions" –